

Color List... **W** White





P Premium Wood (stainable Floor Trim only)

illustrations not to scale

Cable Cover Guide


	Maxi	TV Drop	Mini	Micro	Floor Trim
shape & size (wxh)	2 ³ / ₈ " x 1 ³ / ₁₆ "	2" x 1"	1 ³ / ₁₆ " x ⁵ / ₈ "	5%8" x 5%6"	<i>7</i> 8" x 78"
colors available	U W	W B	U U	W	W P
Trunking Lengths					
5' Length	•	•	•	•	•
6½' Length	•	•	•	•	•
Clip Over Accessories					
Flat Bend			•		use internal bend
Internal Bend			•		•
External Bend			•		•
Equal Tee			•		
Door Top Bend			•		
Inlet/Outlet Coupler (floor trim only)					•
Smooth Fit Accessories					
Flat Bend	•	•	•	•	use internal bend
Internal Bend	•	•	•	•	•
External Bend	•	•	•	•	•
Equal Tee	•	•	•	•	
Cable Outlet	•		•	use equal tee	•
Cable Inlet					•
Reducing Tee (to Mini)	•	•	-		
Coupler	•	•	•	•	•
End Cap Left revenues	•	•	•	•	-
End Cap Left (Floor Trim only) End Cap Right (Floor Trim only)					•
Pattress Adaptor			•		
Circular Adaptor			•		
			•		
Other Accessories					
Ratchet Cutting Tool			•	•	•

Clip Over Accessories









Smooth Fit Accessories










How Clip-Over Accessories Work



1/2 Round Clip Over Accessories (Mini only)



1/2 Round Smooth Fit Accessories



¼ Round Clip Over Accessories

Internal Bend External Bend Cable Inlet/Outlet

¼ Round Smooth Fit Accessories

Internal Bend

External Bend

Cable Inlet


Cable Outlet

Connector



End Cap



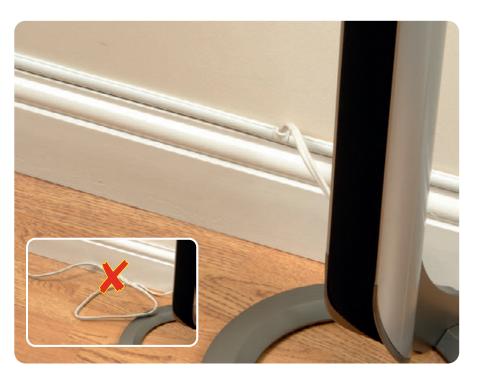

Micro Cable Cover

Feature	Comment
PVC base & lid	 Light weight, easy to handle & cut Self-extinguishing Can be drilled
Elastomer hinge	 Effectively bonds base & lid Lid cannot detach Low-maintenance Keeps cables in place during installation Impact absorbing Can be opened & closed thousands of times
Available Colours	• White
UV stabilised	• Will not discolour or turn brittle in sunlight
Operating temperature	• Stable between -30°C upto +60°C
½ round design	 No sharp edges Enables subtle aesthetics Blends above skirting
External Dimensions	• The smallest profile • 5⁄8" x 5⁄16" (w x h) aka Micro
Popular usages	• To contain wires e.g. low-voltage, telephone cables, speaker wires, alarm cables
Таре	 Foam backed Effective on clean dry surfaces Caution, can spoil surfaces on removal
Can be painted	 Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	• 1.54 lbs per ft
Packaging	Each length supplied with removable film cover
Capacity	• It is recommended to leave 45% of internal capacity for air circulation
Accessories Available	• Yes (Smooth-Fit style)



1³/16″

≰ ⁵⁄8″ ♥



Mini Cable Cover

Feature	Comment
PVC base & lid	 Light weight, easy to handle & cut Self-extinguishing Can be drilled
Elastomer hinge	 Effectively bonds base & lid Lid cannot detach Low-maintenance Keeps cables in place during installation Impact absorbing Can be opened & closed thousands of times
Available Colours	• White
UV stabilised	• Will not discolour or turn brittle in sunlight
Operating temperature	• Stable between -30°C upto +60°C
½ round design	 No sharp edges Enables subtle aesthetics Blends above skirting
External Dimensions	• 1¾16" x ¾" (w x h) aka Mini
Popular usages	 For satellite, aerial & broadband cables; for surface switch and socket installations Cable drops, above skirting tops and across ceilings; for lighting and smoke alarm installations
Таре	 Foam backed Effective on clean dry surfaces Caution, can spoil surfaces on removal
Can be painted	• Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	• 0.33 lbs per ft
Packaging	Each length supplied with removable film cover
Capacity	• It is recommended to leave 45% of internal capacity for air circulation
Accessories Available	• Yes, Smooth-Fit or Clip-Over options



TV Cable Cover

Feature	Comment
PVC base & lid	 Light weight, easy to handle & cut Self-extinguishing Can be drilled
Elastomer hinge	 Effectively bonds base & lid Lid cannot detach Low-maintenance Keeps cables in place during installation Impact absorbing Can be opened & closed thousands of times
Available Colours	• White • Black
UV stabilised	• Will not discolour or turn brittle in sunlight
Operating temperature	• Stable between -30°C upto +60°C
½ round design	• No sharp edges • Enables subtle aesthetics
External Dimensions	• 2" x 1" (w x h) aka TV Drop
Popular usages	• Hide cables from wall-mounted TVs; Hide cables on underside of desktops and up desk legs
Таре	 Foam backed Effective on clean dry surfaces Caution, can spoil surfaces on removal
Can be painted	 Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	• 0.6 lbs per ft
Packaging	Each length supplied with removable film cover
Capacity	 It is recommended to leave 45% of internal capacity for air circulation Can contain up to 6+ popular TV cables
Accessories Available	• Yes (Smooth-Fit style)



Maxi Cable Cover

Feature	Comment
PVC base & lid	• Light weight, easy to handle & cut • Self-extinguishing • Can be drilled
Elastomer hinge	 Effectively bonds base & lid Lid cannot detach Low-maintenance Keeps cables in place during installation Impact absorbing Can be opened & closed thousands of times
Available Colours	• White
UV stabilised	• Will not discolour or turn brittle in sunlight
Operating temperature	• Stable between -30°C upto +60°C
½ round design	• No sharp edges • Enables subtle aesthetics
External Dimensions	• 2¾" x 1¾16" (w x h) aka Maxi - our largest profile!
Popular usages	• Hide cables from wide screen wall-mounted TVs
Таре	• Foam backed • Effective on clean dry surfaces • Caution, can spoil surfaces on removal
Can be painted	 Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	• 0.85 lbs per ft
Packaging	Each length supplied with removable film cover
Capacity	 It is recommended to leave 45% of internal capacity for air circulation Can contain up to 8+ popular TV cables
Accessories Available	• Yes (Smooth-Fit style)



7⁄8″ -

₩ %



¹/₄-Round Floor Trim

Feature	Comment
PVC base & lid	• Light weight, easy to handle & cut • Self-extinguishing • Can be drilled
Elastomer hinge	 Effectively bonds base & lid Lid cannot detach Low-maintenance Keeps cables in place during installation Impact absorbing Can be opened & closed thousands of times
Available Colours	• White • Stainable
UV stabilised	• Will not discolour or turn brittle in sunlight
Operating temperature	• Stable between -30°C upto +60°C
¼ round design	• No sharp edges • Enables subtle aesthetics • For horizontal (& vertical) 90 degree intersections
External Dimensions	• 1⁄8″ x 1⁄8″ (ɯ x h)
Popular usages	• Covers expansions gaps around floor edges • Indoors as Floor Trim; for Worktops; Corner drops
Таре	 Foam backed Effective on clean dry surfaces Caution, can spoil surfaces on removal
Can be painted	 Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	• 0.33 lbs per ft
Packaging	Each length supplied with removable film cover
Capacity	 It is recommended to leave 45% of internal capacity for air circulation
Accessories Available	• Yes, including Clip-Over bends & Inlet/Outlet Connector



Clip-Over Accessories for ½ Circle Cable Cover

Feature	Comment
Rear Grip Tabs	 Hold Accessory in gap between flat surface and D-Line length, as made possible by depth of rear foam-tape
Abs material	• Robust material
Can be painted	 Scuff using gentle abrasive such as fine sandpaper, so paint keys for best results
Popular usage	 Available for Mini (1³/16" x 5%")
Easy-to-install	 Clip-Over style can forgive poor cuts at length ends, and imprecise measuring so saving installation time

Accessory Name	Description	Weight
Internal Bend	• Join lengths around 90 degree inside corners	0.14oz
	(Mini 1¾₅" x ¾" profile only)	
External Bend		
	 Join lengths around 90 degree outside corners (Mini 1³⁄₁₆" x ⁵⁄₈" profile only) 	0.1oz
Flat Bend		
	 Use between 2 lengths that change direction by 90 degrees on flat surfaces (<i>Mini</i> 1³/₁₆" x ⁵/₈" profile only) 	0.1oz
Equal Tee		
	 Use to clip over 3 lengths of same profile (Mini 1³⁄₁₆" x ⁵⁄₈" profile only) 	0.1oz
Door Top Bend		
	• Use to clip over interface of vertical and horizontal lengths (Mini 1 ³ / ₁₆ " x ⁵ / ₈ " profile only)	0.14oz

Accessory Name	Description	Weight
Internal Bend		
	• Join lengths on flat surfaces	0.1oz
External Bend	• Neatly finish open ends	0.1oz



Smooth-Fit Accessories for ½ Circle Cable Cover

Feature	Comment
Internal shoulders	 Enables smooth appearance along installation Creates secure fitment - will not drop off Enable smooth flush alignment between lengths for perfect finish
Abs material	 Robust material Can be modified for fitment on uneven surfaces
Can be painted	 Scuff using gentle abrasive such as fine sandpaper, so paint keys for best results

Accessory Name	Description	Size	Weight
Internal Bend			
	Join lengths around 90 degree inside corners	Micro - 5/8" x 5/16" Mini - 13/16" x 5/8" TV Drop - 2"x1" Maxi - 23/6" x 13/16"	0.04oz 0.07oz 0.24oz 0.70oz
External Bend			
	Join lengths around 90 degree outside corners	Micro - 5%" x 5/16" Mini - 1 ³ /16" x 5%" TV Drop - 2"x1" Maxi - 23%" x 1 ³ /16"	0.04oz 0.10oz 0.50oz 0.50oz
Flat Bend			
	Use between 2 lengths that change direction by 90 degrees on flat surfaces Requires care in measuring gap required for each Accessory, then cut straight length(s) end so Accessory fits neatly between lengths	Micro - 5%" x 5/16" Mini - 1 ³ /16" x 5%" TV Drop - 2"x1" Maxi - 23%" x 1 ³ /16"	0.04oz 0.10oz 0.50oz 0.77oz
Equal Tee			
	Join 3 lengths of same profile	Micro - 5%" x 5/16" Mini - 13/16" x 5%" TV Drop - 2"x1" Maxi - 23%" x 13/16"	0.04oz 0.14oz 0.60oz 0.81oz
Connector			
	Join 2 lengths of same profile on flat surface	Micro - 5%" x 5/16" Mini - 1 ³ /16" x 5%" TV Drop - 2"x1" Maxi - 23%" x 1 ³ /16"	0.04oz 0.10oz 0.50oz 0.77oz
End Cap			
	Neatly finish open ends	Micro - 5%" x 5/16" Mini - 1 ³ /16" x 5%" TV Drop - 2"x1" Maxi - 2¾" x 1³/16"	0.04oz 0.10oz 0.50oz 0.77oz

D-Line reserves the right to amend any specification detail

Accessory Name	Description	Size	Weight
Circular Adaptor	Connect Mini D-Line to flat edge surface boxes with 20mm diameter 3 circular knock-outs	Mini - 1¾6″ x ⅔″	0.17oz
Patress Adaptor	Connect Mini D-Line(interfaces with 30x15mm only) to round Surface Boxes	Mini - 1¾₅″ x ‰″	0.10oz
Cable Inlet/Outlet	Takes cables in or out of a Mini installation. Use between lengths on straight runs	Mini - 1³⁄1₅" x %"	0.10oz


Installation Tips

Plan your cable path. Check that you have all parts required. Next consider the space that will be required for any accessories needed - Smooth-Fit ccessories give a smooth flush-alignment for perfect finish, but require precise measurements and straight cuts.

Use the accessory part as a template; pencil mark the surface at the shoulder points of the accessory.

These pencil marks indicate the point that the D-Line length needs to measure up to.





- Measure length(s). Pencil mark where cut is required.
- Use a mitre block and junior hacksaw to cut at the outer edge of the pencil mark.
- Remove the protective film cover.
- Peel & stick.. Make sure the surface is clean & dry. Alternatively lengths can be drilled and screw fixed.
- For easier installation we recommend that horizontal runs are fixed with the click lock at the top and the hinge at the base.
- Take care when positioning lengths, as a strong bond will be created with the surface.

Installing cables & accessories

Lay wires into lengths, place the required accessory over the wires, then close the lid ensuring it snaps shut. The lengths hold the accessories in position.



After Care



D-Line can accept gloss or emulsion paints... For best results use fine sandpaper to key the surface prior to painting.



Clip-Over Accessories for ¼ Circle Floor Trim

Feature	Comment
Rear Grip Tabs	 Hold Accessory in gap between flat surface and D-Line length as made possible by depth of rear foam-tape
Abs material	 Robust material Can be modified for fitment on uneven surfaces
Can be painted	 Scuff using gentle abrasive such as fine sandpaper, so paint keys for best results
Easy-to-install	 Clip-Over style can forgive poor cuts at length ends, and imprecise measuring so saving installation time

Accessory Name	Description	Weight
Internal Bend		
	• Join lengths around 90 degree inside corners	0.07oz
External Bend		
	• Join lengths around 90 degree outside corners	0.10oz
Cable Inlet/Outlet		
	• Use to provide cable entry/exit point between 2 lengths	0.07oz
Connector		
	• Joins 2 lengths on flat surfaces	0.07oz

End Cap



- Neatly finish open ends
- 0.10oz
- Simply push in. (note: left & right versions apply)



Smooth-Fit Accessories for ¼ Circle Floor Trim

Feature	Comment
Internal shoulders	 Enables smooth appearance along installation Creates secure fitment - will not drop off Enable smooth flush alignment between lengths for perfect finish
Abs material	 Robust material Can be modified for fitment on uneven surfaces
Can be painted	 Scuff using gentle abrasive such as fine sandpaper, so paint keys for best results

Accessory Name	Description	Weight
Internal Bend		
	• Join lengths around 90 degree inside corners	0.07oz
External Bend		
	• Join lengths around 90 degree outside corners	0.10oz
Cable Inlet		
	 Use to provide cable entry point between 2 lengths 	0.07oz
Cable Outlet		
	• Use to provide cable exit point between 2 lengths	0.07oz
Connector		
	• Joins 2 lengths on flat surfaces	0.07oz
End Cap		

End Cap



D-Line reserves the right to amend any specification detail

- Neatly finish open ends
 Simply push in. (note: left & right versions apply)

0.10oz

Installation Tips

Plan your cable path. Check that you have all parts required.

Next consider the space that will be required for any accessories needed - Smooth-Fit accessories give a smooth flush-alignment for perfect finish, but require precise measurements and straight cuts.

Use the accessory part as a template; pencil mark the surface at the shoulder points of the accessory.

These pencil marks indicate the point that the D-Line length needs to measure up to.

Cutting & Installing Lengths



- Measure length(s). Pencil mark where cut is required.
- Use a mitre block and junior hacksaw to cut at the outer edge of the pencil mark.
- Remove the protective film cover.
- To peel & stick... Make sure the surface is clean & dry.
- For easier installation we recommend that horizontal runs are fixed with the click lock at the top and the hinge at the base.
- Take care when positioning lengths, as a strong bond will be created with the surface.

Installing cables & accessories

Lay wires into lengths, place the required accessory over the wires, then close the lid ensuring it snaps shut. The lengths hold the accessories in position.



Connector



It may be necessary to shape some accessories to allow for imperfections on walls.

Important: If using D-Line for 240v mains cables it is recommended you leave 45%+ of internal capacity for air circulation.

example...









