


D-LINE®

Mini+ Trunking 40mm x 20mm

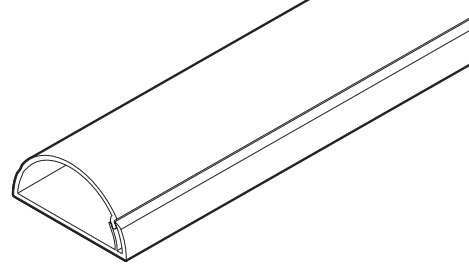

Single Piece Design

D-Line 40 x 20mm Mini+ profile provides capacity ideal for 2x 4mm T&E cables for example.


As applicable to all D-Line lengths, the hinged lid is always attached so future maintenance concerns are minimised.

Available with Smooth-Fit accessories.

- Unique stylish 'D-Line' appearance
- Patented hinge & click-lock lid
- Paintable
- Smooth-Fit accessories available for perfect finish
- 'Easy to install, looks great!'
- Self-adhesive
- Fully safety tested and certified to BS EN 50085-1:2005

Code	Description
R2D4020W	(L) 2m x (W) 40mm x (H) 20mm White
R3D4020W	(L) 3m x (W) 40mm x (H) 20mm White

Mini+ Trunking 40mm x 20mm

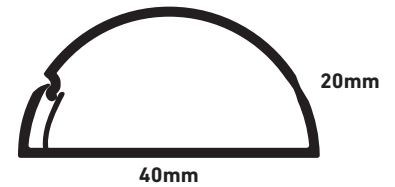

Product Specification

Production method • Single piece design, produced in one single process by extrusion

PVC base & lid • Light weight, easy to handle & cut - lid cannot detach
• Self-extinguishing
• Can be drilled

Elastomer hinge • Effectively bonds base & lid
• Impact absorbing
• Can be opened & closed thousands of times

Available colours • White

UV stabilised • Will not discolour or turn brittle in sunlight

Operating temperature • Stable between -30°C upto +60°C

½ round design • No sharp edges
• Enables subtle aesthetics
• Blends above skirting

External dimensions • 40mm x 20mm (w x h)

Tape • Foam backed 1mm thick
• Effective on clean dry surfaces
• Caution, can spoil surfaces on removal

Paintable • Scuff using gentle abrasive such as sandpaper, so paint keys for best results

Weight • 0.15 kg per metre

Packaging • Each length supplied with removable film cover

Capacity • If containing 240v cables leave 45% of internal capacity for air circulation

Quality approvals • BS EN 50085 - 1:2005 Part 1 SGS Registration ELS 185841/2/C/AB/16